

Total Solutions System **STATIONARY BATTERIES**



WINNER[®]

**BATTERY
SWITCH FOR SUCCESS**

AGM HIGH DISCHARGE RATE

- High Rate discharge Valve Regulated rechargeable AGM batteries
- Optimum grid plate design – safe & reliable leakage-proof performance
- Minimum self-discharge – low internal pressure operation
- More Watts per cell than conventional series
- High current discharge output
- 6 – 10 years designed service life



www.winnerbattery.net

ICARUS


SEALED MAINTENANCE FREE RECHARGEABLE BATTERY



Type No	Voltage	Capacity	15 min Rate	Max Discharge Current	Dimensions (mm)				Layout	Terminal	Weight (Kg)
	V	AH (C20)	W/cell	A	L	W	H	T.H.			
621W	6	5	21	75	70	47	101	106	2	F1	0,88
653W	6	13	53	195	151	50	95	100	1	F1	2,15
1223W	12	5	23	75	90	70	101	107	1	F1,F2	1,95
1224W	12	6	24	90	151	50	94	100	3	F1	2,30
1236W	12	9	36	135	151	65	94	100	3	F1,F2	2,75
1253W	12	13	53	195	151	98	94	100	3	F2	4,06
1285W	12	21	85	315	181	76	167	167	0	F12	6,70
12103W	12	25	103	375	166	175	125	125	0	F3,F12	9,98
12135W	12	33	135	495	196	130	158	179	1	F13	12,05
12150W	12	40	150	600	196	165	170	170	0	F13	14,50
12205W	12	60	205	900	228	138	208	213	1	F15	18,40
12265W	12	82	265	1230	260	168	208	227	1	F15	24,00
12275W	12	86	275	1290	350	167	179	179	1	F15	24,60
12300W	12	75	300	1125	260	168	208	227	1	F15	26,50
12365W	12	90	365	1350	304	168	208	229	1	F18	30,30
12375W	12	110	375	1650	329	172	216	223	1	F17	30,50
12435W	12	130	435	1950	407	173	222	231	1	F17	37,20
12475W	12	135	475	2025	345	172	275	278	1	F18	44,00
12515W	12	160	515	2400	483	171	240	240	1	F17.3	45,70
12700W	12	220	700	3300	522	238	218	223	4	F18	67,00
12830W	12	270	830	4050	521	269	220	225	4	F17.3	78,20

More types available on request

KEY FOR LAY OUT

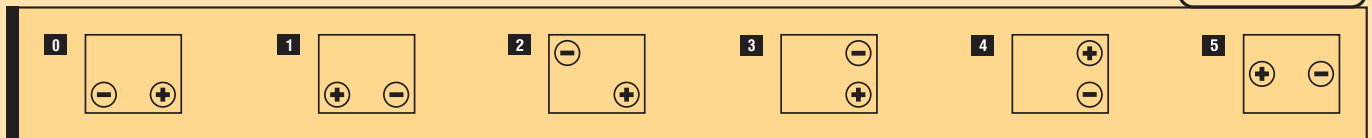

APPLICATIONS

U.P.S / E.P.S
Battery Boosters /
Electric powered tools

Medical Equipment
Toys
Alarm & Signal instruments

Telecommunication Centers
Portable Electronic devices
Security Systems

